

INDUCTIVE LINEAR POSITION SENSOR

USER MANUAL

ILT-110 (SSI Output)

GENERAL DESCRIPTION



The working principle of ILT-110 series inductive linear position sensors depends on the RLC coupling between the positioning element and the sensor. An output signal is provided according to the position of the positioning element. Thanks to the touchless working principle, they are long-lasting since there are no factors such as wear and tear.

They offer wide temperature tolerance, high repeatability, resolution and linearity. They work stably for a long time without being affected by electromagnetic fields. They are used in applications such as manufacturing engineering, plastic injection molding, textile, packaging, sheet metal working, woodwork, automation technology.

WARNINGS

- The installation of the product is carried out by the customer who purchases the product, according to the wiring diagrams, installation information, etc. in this manual.
- Maintenance and repair should be done by the technicians authorized by the manufacturer firm.
- There must be minimum distance between the sensor and control unit. Avoid additions except the suitable connector unless it needs.
- The system may perform uncontrolled movements during start-up, especially when it is part of a control system whose parameters have not yet been set. For this reason, the sensor should not be used especially in applications where the safety of property and life depends on the operation of the device.
- For not to damage the sensor, supply directions and voltage range must be paid attention. Don't energize before all connections completed.
- Transducer and controller must be connected by using a shielded cable. The cable shield must be grounded.
- Elongation of the cable connection to more than 30 m results in loss of CE compliance !
- Very strong magnetic fields in the immediate vicinity of the position marker can cause false signals.
- Transport and storage should be at their original packaging and an ambient temperature of -20°C / + 70°C in such a way that they will not be exposed to dust, humidity, impact, vibration, falling or water.
- Chemicals such as alcohol, thinner etc. should not be used for cleaning the product. The product should be wiped with a damp cloth.
- The product may be damaged and may become unusable if used outside of the specifications in the user manual.
- The product will be out of warranty if used outside of the specifications in the user manual and opened or repaired other than authorized services.

TECHNICAL DATA


Mechanical Data

Housing Length (A)	B + 84 mm
Electrical Stroke (B)	Between 100 mm... 500 mm in steps of 50 mm Between 500 mm... 1000 mm in steps of 100 mm
Protection Class	IP64
Life	Mechanically unlimited
Connection Type	Angled ball joint ($\pm 18^\circ$)
Mechanical Fixing	Adjustable (movable) mounting feet
Operating Temperature	-20°C...+70°C
Storage Temperature	-20°C...+70°C
Material	Position Marker: POM Housing: Anodized aluminum

Electrical Data

Electrical stroke (B)	Between 100 mm... 500 mm in steps of 50 mm, Between 500 mm... 1000 mm in steps of 100 mm
Protocol	SSI 24 and 25 bit (ask for others)
Parity Bit	Even / Odd / None (default)
Alarm Bit	Active High / Active Low / None (default)
Process data area	Bit 0... Bit 19
Inputs	RS422
Monofloptime (tm)	20 μ s
Encoding	Gray, Binary
Output Update rate	500 Hz (depends on the filter)
Resolution (LSB)	Selectable between 1...1000 μ m
Signal propagation delay	2, 3, 4, 5, 6, 8, 10 ms (according to filter selection)
Reproducibility	$\leq \pm 0.012$ FS (when the signal propagation delay is 10 ms)
Absolute Linearity	$\leq \pm 0.025$ FS (min. ± 100 μ m) (when the signal propagation delay is 10 ms)
Supply voltage	8...33 VDC
Supply voltage ripple	≤ 10 Vss
Power consumption (w/o load)	0.5W
Overvoltage protection	33 VDC
Reverse polarity protection	Yes, up to supply voltage max
Short circuit protection	Yes (outputs, GND and supply voltage up to 7V)
Ohmic load at outputs	$>120\Omega$
Max. Clock rate	1 MHz

SSI TIMING DIAGRAM

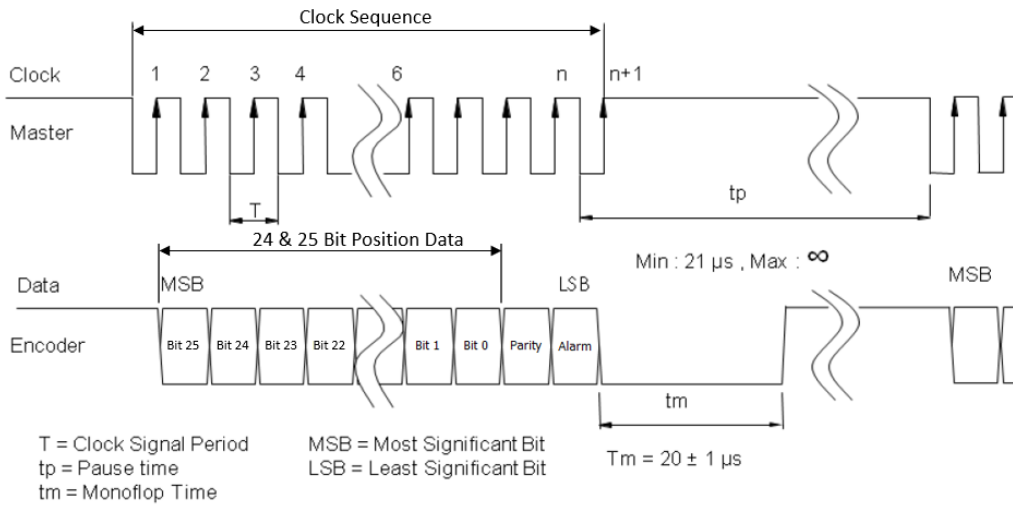


If the device resolution is less than 24 or 25 Bits, the remaining bit fields from the MSB are filled with 0.

The device indicates this status with the Alarm bit at power-on after the lock state.



Alarm: 1 (alarm) MCU lock up alarm MCU watchdog alarm
 0 (no alarm)

ELECTRICAL CONNECTIONS

Signal	Cable	M12 / 8 pin male connector
Clk+	White	Pin 1
Data+	Yellow	Pin 2
Clk-	Blue	Pin 3
N/C	N/C	Pin 4
Data-	Green	Pin 5
GND	Black	Pin 6
Supply Voltage	Red	Pin 7
N/C	N/C	Pin 8



MECHANICAL DIMENSIONS (mm) AND MOUNTING

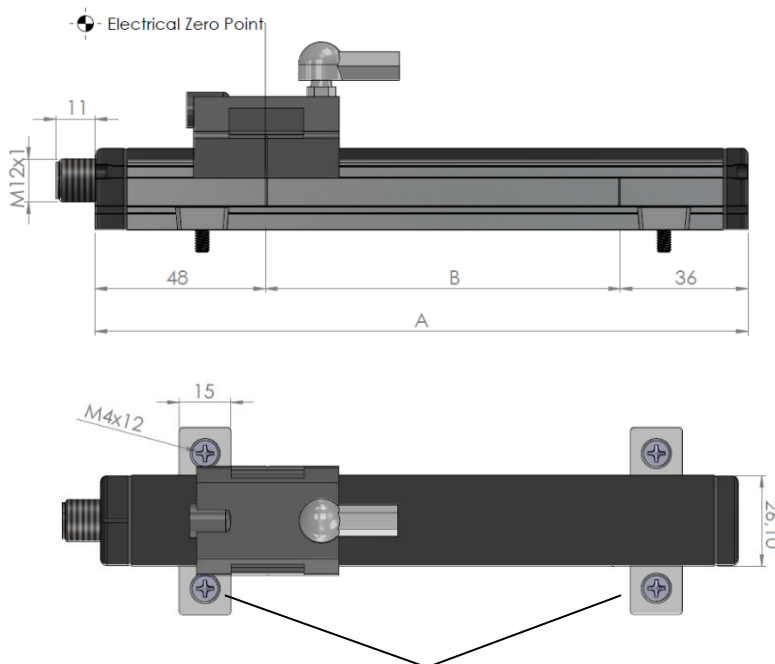



As an alternative to the mounting with mounting clamps the transducers can be fixed by a M8 nut (DIN 439, 4.0 mm thick) which is inserted into the groove.

Mounting clamps:


- Do not attach to the flanges solely to the housing profile
- Several mounting clamps : position at an even distance
- 2 mounting clamps : distance to each other approx 2/3 of the housing length

POSITION MARKERS

GPM-U (Guided and Top Joint)


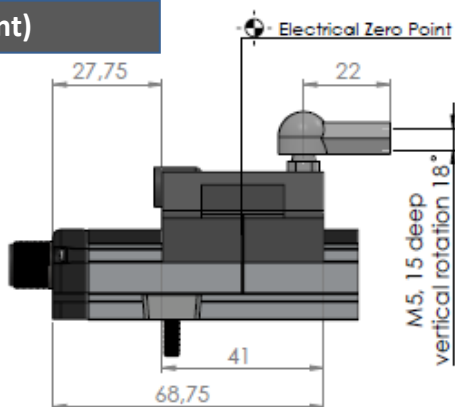


	GPM-6-U	GPM-10-U
Stroke Used	100 ... 600 mm	700 ... 1000 mm
Housing Material	POM	
Joint Material	Igumid G / iglide® L280 (W300)	
Weight	~20 gr	

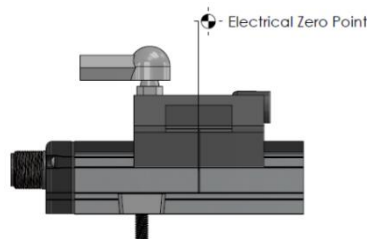


The position marker can be mounted in both directions.

GPM-Y (Guided and Side Joint)


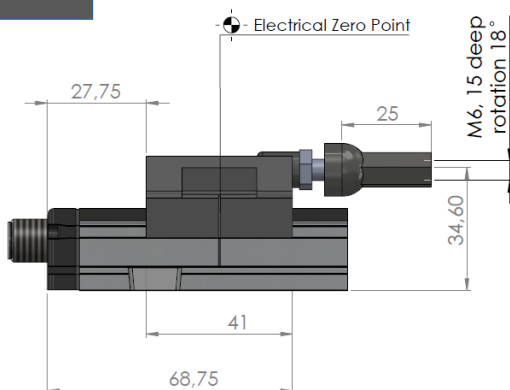


	GPM-6-Y	GPM-10-Y
Stroke Used	100 ... 600 mm	700 ... 1000 mm
Housing Material	POM	
Joint Material	Igumid G / iglide® L280 (W300)	
Weight	~22 gr	

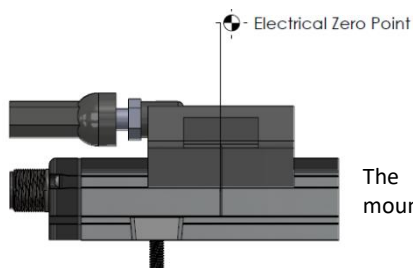


The position marker can be mounted in both directions.

FPM (Floating and independent)

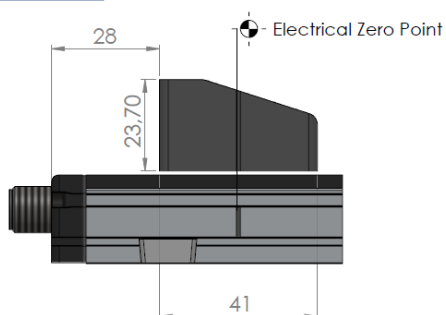


	FPM-6	FPM-10
Stroke Used	100 ... 600 mm	700 ... 1000 mm
Working Distance (A)	0,3 mm	
Mounting Dimension (B)	47 mm	
Perm. Lateral offset	± 0,5 mm	
Housing Material	POM	
Weight	~23 gr	

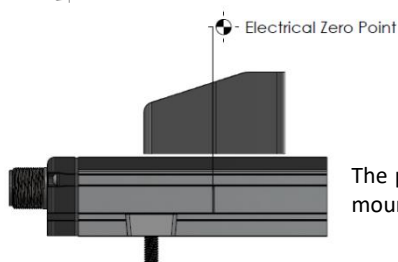

The position marker can be mounted in both directions.

LED FUNCTION

Led Color	Description
Off	Sensor is not working – No supply
Green	Sensor is working – Position marker is within measuring range
Blue flash (1 sn)	Sensor is working - Position marker is outside of measuring range (± 6 mm max)
Red flash (1 sn)	Sensor is working - Position marker is outside of measuring range
Red fast flash (100 ms)	Sensor error



BOX CONTENT

Product	Description
ILT-110	Inductive Linear Position Sensor
Mounting Clamps	4 pcs up to 500 mm stroke, 6 pcs after 500 mm stroke
Mounting Screw	M4x15 countersunk screw (according to number of mounting clamps)
Stud bolt	M5x80 Stud bolt, 1 pcs
Joint	M5 female joint, 1 pcs
User Manual	1 pcs

ORDER CODE

Model	Resolution	Electrical Interface	Parity Bit	Electrical Connection
	Selectable between 1...1000 μ m	SSI : SSI	E: Even O: Odd N: None (default)	S14M : M12/8pin male connector
ILT110 - XXXX - XXXX - XX - XXX - XXX - X - X - XXXX				
Measuring Lengths (stroke)	Filter Selection	Output Signal	Alarm Bit	
Different measuring lengths from 100 mm to 1000 mm	02 : 2ms (standard)	24G : SSI 24 bit, Gray	H : Active high	
*Measuring length can be selected between 100 mm... 500 mm in 50 mm steps, between 500 mm... 1000 mm in 100 mm steps.	*For others see Electrical specifications/signal propagation delay	25G : SSI 25 bit, Gray	L : Active low	
		24B : SSI 24 bit, Binary	N : None (default)	
		25B : SSI 25 bit, Binary		
		*Ask for others.		



Disposal of Packagings: Packaging materials consist of recyclable materials. For providing recycling, please dispose waste packagings to collecting points of authorized recycling facilities.

Disposal of E-Waste: This device is in conformity with WEEE Directive and consists of recyclable materials. This product should not be disposed with general waste for preventing negative effects on environment and human health. This product should be disposed to collecting points of authorized recycling facilities. Further information can be reached from authorized unit.

Üretici firma ve yetkili servisin ünvan, adres, telefon numarası ve diğer iletişim bilgileri

Firma: ATEK ELEKTRONİK SENSÖR TEKNOLOJİLERİ SANAYİ VE TİCARET A.Ş.

Adres: Gebze Organize Sanayi Bölgesi, 800. Sokak, No:814 41400 Gebze, KOCAELİ/TÜRKİYE

TEL: +90 262 673 76 00 **FAX:** +90 262 673 76 08

E-mail: info@ateksensor.com

Web: www.ateksensor.com