

## AWP 812

“Analog or CANopen Output, High Accuracy, IP67 Protection”




- Different stroke (measuring) lengths up to 5000 mm
- Magnetic absolute measurement technology
- Robust stainless steel measuring wire
- Aluminium housing
- Analog or CANopen output
- Programmable analog output option
- IP67 protection class
- Compact design and easy mounting
- 1 m/s maximum movement speed
- Shock/vibration resistant

## MEKANİK VERİLER

Measuring Range (stroke)	Different measuring lengths up to 5000 mm
Max. Movement speed	1 m/s
Extension Force	12N
Protection Class	IP67
Operating Temperature	-40°C...+85°C
Material	Body: Aluminium
	Measuring wire: Stainless steel

## MECHANICAL DIMENSIONS (mm)

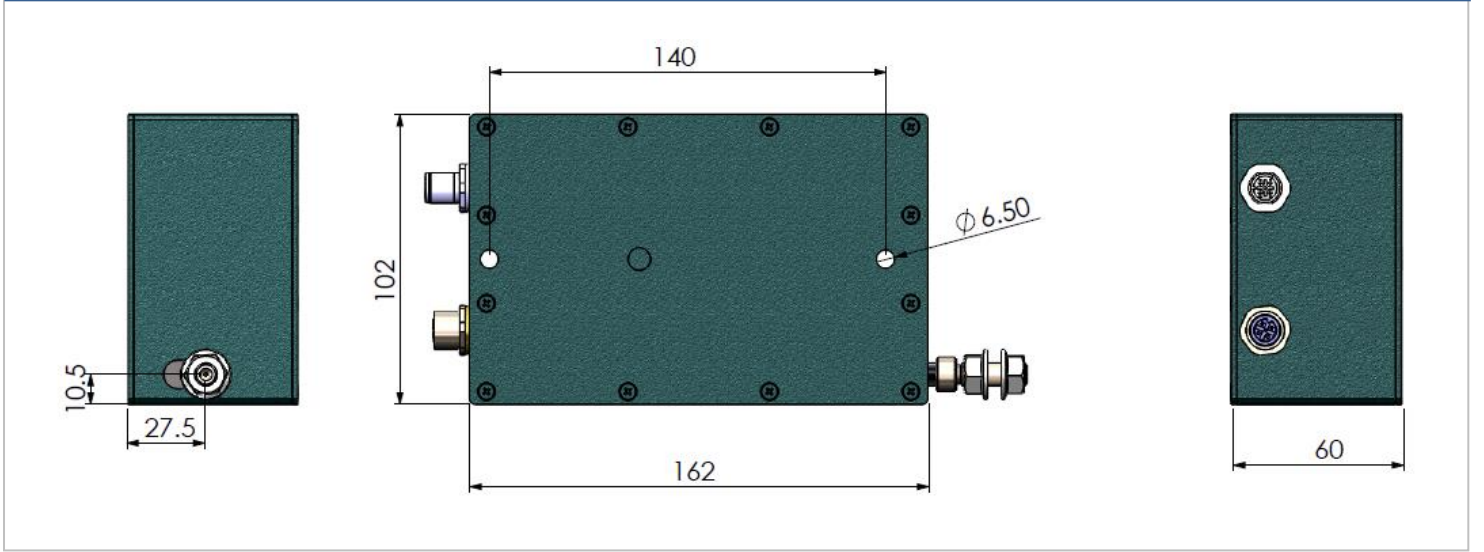


ANALOG VERSION

Electrical Specifications

Measuring range	Different measuring lengths up to 5000 mm
Supply voltage	15...26 VDC
Current consumption	≤60 mA
Reverse polarity protection	Yes
Short circuit protection	Yes (only supply)
Response frequency	500 Hz
Resolution	0.05 mm
Linearity	±%0.5 FS
Output signal	Voltage: 0-10V, 0.5-4.5V, 0-5V Current: 4-20 mA
Signal characteristics	Increasing (exmp: 4-20 mA) Decreasing (exmp:20-4 mA)
Sensing device	Magnetic absolute encoder
Electrical connection	M12 connector or cable

Electrical Connection

Signal	Cable	M12 / 5 pin male connector
V+ (15...26 VDC)	Red	Pin 1
Analog output signal	Yellow	Pin 2
GND	Black	Pin 3
N/C	Green	Pin 4
N/C	Pink	Pin 5



Order Code

Electrical Connection

**S13M:** M12/5 pin male connector  
**2M:** 2m cable  
 \*Optional others

Model

AWP 812	-	XXXX	-	XXXX	-	XX
---------	---	------	---	------	---	----

Measuring Range

Different measuring lengths up to 5000 mm

Analog Output Signal

**V** : 0-10 VDC  
**V1** : 0-5 VDC  
**A** : 4-20 mA  
**V3** : 0.5-4.5 VDC  
**NV** : 10-0 VDC  
**NV1** : 5-0 VDC  
**NA** : 20-4 mA  
**NV3** : 4.5-0.5 VDC


## ANALOG VERSION, PROGRAMMABLE

### Electrical Specifications

Measuring range	Different measuring lengths up to 5000 mm
Supply voltage	15...26 VDC
Current consumption	≤60 mA
Reverse polarity protection	Yes
Short circuit protection	Yes (only supply)
Response frequency	500 Hz
Resolution	0.05 mm
Linearity	±%0.5 FS
Output signal	Voltage: 0-10V, 0.5-4.5V, 0-5V (programmable) Current: 4-20 mA (programmable)
Signal characteristics	Increasing (exmp: 4-20 mA) Decreasing (exmp:20-4 mA)
Sensing device	Magnetic absolute encoder
Electrical connection	M12 connector or cable

### Electrical Connection

Signal	Cable	M12 / 5 pin male connector
V+ (15...26 VDC)	Red	Pin 1
Analog output signal	Yellow	Pin 2
GND	Black	Pin 3
N/C	Green	Pin 4
SPAN/ZERO	Pink	Pin 5





**SETTING MEASUREMENT LIMITS:** With this feature, you can set the minimum and maximum measurement limits.

In order to determine the **minimum measurement limit (lim1)**, the SPAN/ZERO and GND terminal are short-circuited for at least 3 seconds.

In order to determine the **maximum measurement limit (lim2)**, the SPAN/ZERO and GND terminal are short-circuited for at least 6 seconds.

To **return to the factory settings**, the SPAN/ZERO and GND terminal are short-circuited for at least 10 seconds.

### SAMPLE SIGNAL OUTPUT GRAPHICS

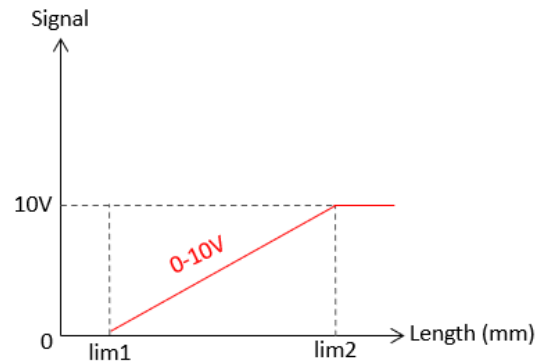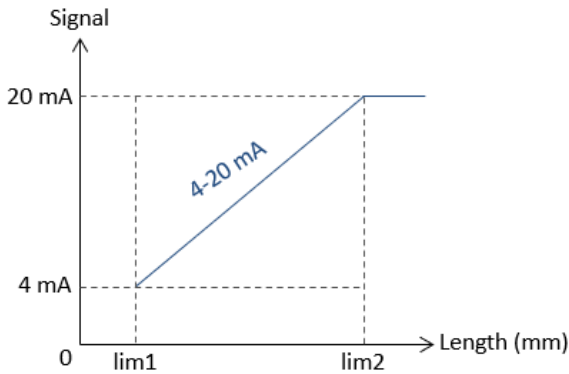

### Order Code

Model	Electrical Connection	Programming Feature
AWP 812 - XXXX - XXXX - XX - XX	S13M: M12/5 pin male connector 2M: 2m cable *Optional others	PL: Programmable

#### Measuring Range

Different measuring lengths up to 5000 mm

#### Analog Output Signal

V : 0-10 VDC  
V1 : 0-5 VDC  
A : 4-20 mA  
V3 : 0.5-4.5 VDC  
NV : 10-0 VDC  
NV1 : 5-0 VDC  
NA : 20-4 mA  
NV3 : 4.5-0.5 VDC

## CANopen VERSION

### Electrical Specifications


Measuring range	Different measuring lengths up to 5000 mm
Supply voltage	12...30 VDC
Current consumption	≤60 mA
Reverse polarity protection	Yes
Short circuit protection	Yes (only supply)
Response frequency	500 Hz
Resolution	50µm
Linearity	±%0.5 FS
Sensing device	Magnetic absolute encoder
Electrical connection	M12 connector or cable

### CANopen Specifications

Communication Profile	CiA 301
Device Type	CANopen, CiA DS406
Node ID	Adjustable from 1 to 127 with LSS or SDO
Baud Rate	10 kBit/s, 20 kBit/s, 50 kBit/s, 100 kBit/s, 125 kBit/s, 250 kBit/s, 500 kBit/s, 800 kBit/s, 1 Mbit/s
PDO Data Rate	100 ms
Error Control	Heartbeat, Emergency Message
PDO	3 Tx PDO
PDO Modes	Event/Time triggered, Synch/Asynch
SDO	1 server
Position Information	Object Dictionary 0x6020
Termination Resistance	Optional 120Ω

### Electrical Connection

Signal	Cable	M12 / 5 pin male connector
CAN SHIELD	CAN SHIELD	Pin 1
V+ (12...30VDC)	Red	Pin 2
GND	Black	Pin 3
CAN_H	Yellow	Pin 4
CAN_L	Green	Pin 5



### Order Code

Model		Electrical Connection				
AWP 812	-	XXXX	-	XXXX	-	X
Measuring Range				Output Signal		
Different measuring lengths up to 5000 mm				C : CANopen		

#### Electrical Connection


**S13M:** M12/5 pin male connector

**2M:** 2m cable






\*Optional others

## MOUNTING AND WARNINGS




1. Never release the wire after pulling. Otherwise, the coil spring will be damaged.

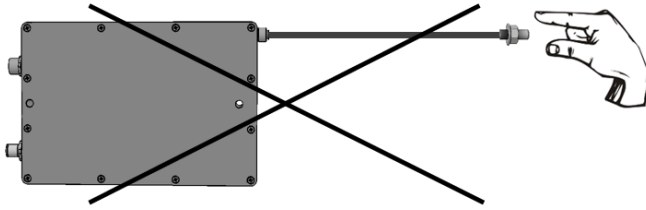



2. Mount the sensor according to the mounting directions shown below.

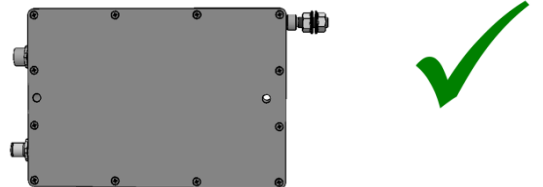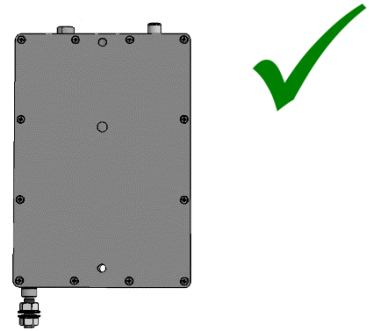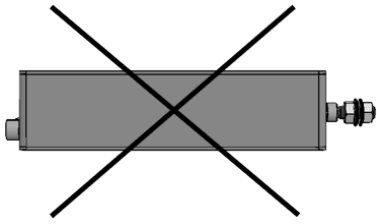

3. If there is a trickle of water (like a rain), the wire outlet must not be a drip of water upstream. If needed please use guide rollers.

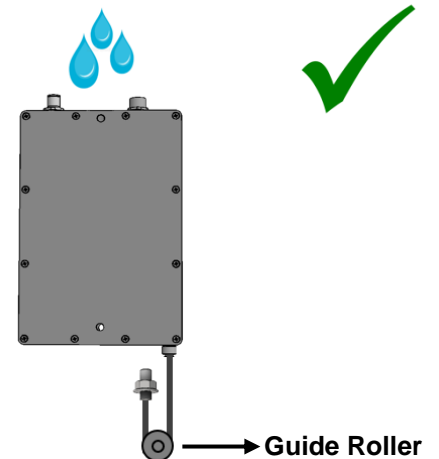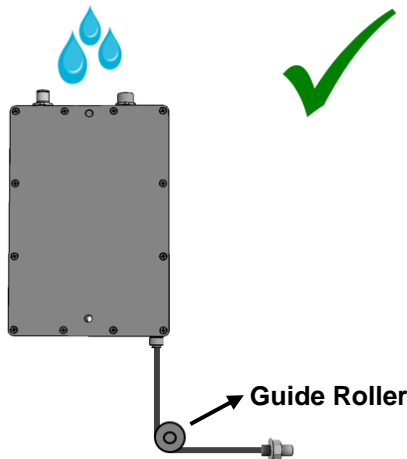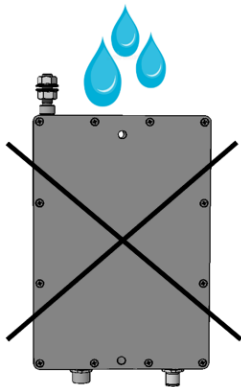

4. The wire should not be pulled in angular. If needed, please use guide rollers.

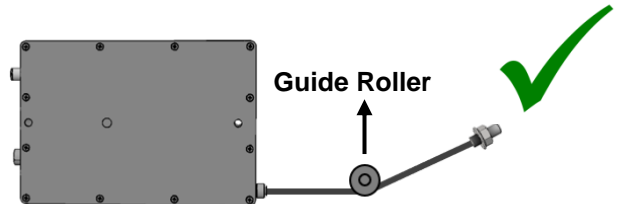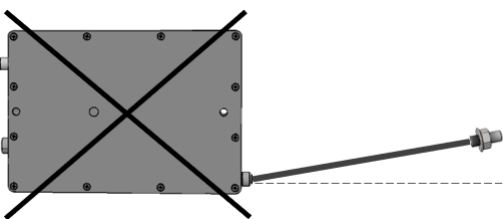

**Important Note(!): Failure to comply with these recommendations, the malfunctions that may occur will not be under the warranty.**